

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, D.C. 20037-3202
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

CALIFORNIA OFFICE

1010 EL CAMINO REAL
MENLO PARK, CA 94025
TELEPHONE (650) 325-5800
FACSIMILE (650) 325-6606

BOX: PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

July 19, 1999

JAPAN OFFICE

TOEI NISHI SHIMBASHI BLDG. 4F
13-5 NISHI SHIMBASHI 1-CHOME
MINATO-KU, TOKYO 105, JAPAN
TELEPHONE (03) 3503-3760
FACSIMILE (03) 3503-3756

Re: Application of Hideya TAKEO
METHOD, APPARATUS AND RECORDING MEDIUM FOR DATA COMPRESSION
Our Reference: Q55129

Dear Sir:

Attached hereto is the application identified above including the specification, claims, executed Declaration and Power of Attorney, ten (10) sheets of drawings, two (2) priority documents, Information Disclosure Statement and PTO Form 1449 with references, executed Assignment and PTO Form 1595.

The Government filing fee is calculated as follows:

Total Claims	27 - 20 =	7 x \$18 =	\$ 126.00
Independent Claims	3 - 3 =	0 x \$78 =	\$ 000.00
Base Filing Fee	(\$760.00)		\$ 760.00
Multiple Dep. Claim Fee	(\$260.00)		\$ 260.00
TOTAL FILING FEE			\$ 1146.00
Recordation of Assignment Fee			\$ 40.00
TOTAL U.S. GOVERNMENT FEE			\$ 1186.00

Checks for the statutory filing fee of \$ 1146.00 and Assignment recordation fee of \$ 40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from:

Japanese Patent Application


(patent)202501/1998
(patent)350159/1998

Filing Date

July 17, 1998
December 9, 1998

Since the anniversary of the priority date fell on a Saturday, the filing of this application on Monday, July 19, 1999 is sufficient to obtain the benefit of priority.

Respectfully submitted,
SUGHRUE, MION, ZINN, MACPEAK & SEAS
Attorneys for Applicant(s)

By 
Darryl Mexic
Registration No. 23,063

DM:rtw

METHOD, APPARATUS AND RECORDING MEDIUM FOR DATA COMPRESSION

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a method and an apparatus for compressing original data by coding thereof, and to a computer-readable recording medium storing a program for causing a computer to execute the data compression method.

Description of the Related Art

10 In the field of data compression such as image data compression by an image server in a medical network and compression of general data such as for communication and filing, various compression algorithms have been proposed. For example, as substantially efficient compression algorithms, the WTCQ method (P. Sriram and M. W. Marcellin, "Image coding using wavelet transforms and entropy-constrained trellis-coded quantization", IEEE Transactions on Image Processing, vol. 4, pp.725-733, June 1995) and the SPIHT method (A. Said and W. A. Pearlman, "A new Fast and Efficient Image Codec Based on Set Partitioning in Hierarchical Trees", IEEE Transactions on Circuits and Systems for Video Tech., vol. 6. pp. 243-250, June 1996) have been proposed. Figure 11 is a diagram explaining a compression algorithm according to the WTCQ method and the SPIHT method. Original image data S representing an original
15
20
25 image are wavelet-transformed first. Data in each subband after the transform are classified while bit allocation is

determined. Based on the determined bit allocation, quantization according to a TCQ method is carried out to obtain quantized data RS. Coded data are obtained by carrying out entropy coding on the quantized data RS. As the method for the entropy coding, in the WTCQ method, bit-plane binary arithmetic coding is used. In the bit-plane binary arithmetic coding, quantized data are decomposed into a plurality of bit planes, and converted into binary data. Binary arithmetic coding is carried out on the data in each bit plane and each output is coded. Meanwhile, in the SPIHT method, multi-valued arithmetic coding is used as the entropy coding. By compressing the original image data S in this manner, efficient coding with a substantially low bit rate can be carried out.

In the field of general JPEG compression, as shown in Figure 12, an arithmetic coding method or a baseline method can be used. In the case of JPEG compression, discrete cosine transform (DCT) is carried out on the original image data S and quantization is carried out by determining bit allocation. In the case of arithmetic coding, after the quantized data RS have been converted from multi-valued data to binary data, binary arithmetic coding is carried out to obtain coded data. Meanwhile, in the case of the baseline method, the quantized data RS are coded using Huffman coding.

In the above-described SPIHT method, since multi-valued arithmetic coding is carried out, compression efficiency thereof is higher than that of the conventional Huffman coding

or the like. However, computation therefor is time-consuming, since the multi-valued arithmetic coding is a substantially complex operation. Meanwhile, in the WTCQ method, since binary arithmetic coding is carried out, computation is carried out faster than in the SPIHT method. However, upon entropy coding, quantized data are decomposed into a plurality of bit planes (practically, approximately 14) and binary-coded, and it is necessary to carry out binary arithmetic coding thereafter on each bit plane. Therefore, as for the WTCQ method, a computational load becomes heavy as a whole, and the execution time is long.

In the arithmetic coding method in the above-described JPEG compression, data are binary coded as in the WTCQ method. Therefore, a computational load is heavy and the execution time is long. The baseline method uses Huffman coding, and the compression efficiency is thus lower than the WTCQ method or the like.

SUMMARY OF THE INVENTION

The present invention has been created based on consideration of the above problems. An object of the present invention is to provide a method and an apparatus for efficient and fast data compression, and a computer-readable recording medium storing a program to cause a computer to execute the data compression method.

A data compression method of the present invention is a data compression method of obtaining compressed coded data by

quantization of original data to obtain quantized data followed by coding and compression of the quantized data. The data compression method of the present invention comprises the steps of:

5 classifying the quantized data into data having a value representing the quantized data and at least one set of classified data representing a data value other than the representative value while obtaining classification information data regarding this classification;

 coding the classification information data according to a first coding method; and

 obtaining the coded data by coding at least the classified data out of the classified data and the data having the representative value, according to a second coding method.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
10170
10175
10180
10185
10190
10195
10200
10205
10210
10215
10220
10225
102

wavelet-transformed data in each subband.

Furthermore, it is preferable for the data having the representative value to be 0 data representing the value 0 of the quantized data , and it is preferable for the classified data to be non-zero data representing non-zero values of the quantized data.

The "value representing the quantized data" herein referred to means various kinds of values such as an average of the data values, a mode in the quantized data, and the value 0. As a method of classifying the quantized data into the data having the representative value and the data other than those, various kinds of methods can be used. For example, the quantized data may be classified simply according to the representative value and non-representative values. Alternatively, the data may be classified into the data having the representative value and data having values smaller and larger than the representative value, or into the data having the representative and data having values whose absolute differences from the representative value are smaller and larger than a threshold value.

The "classification information data" have a value corresponding to the number of classification classes. For example, when the quantized data are classified into 2 classes, namely the data having the representative value and the data having values other than that, the classification information data are binary. When the quantized data are classified into

the data having the representative value and data having the values below and above the representative value, the classification information data are 3-valued.

Furthermore, "at least the classified data are coded according to the second coding method", because the data having the representative value are not coded in some cases, as in the case where the representative value is 0.

The phrase stating that the coding method "is different between the data having the representative value and each set of the classified data" means the case where the data having the representative value and the classified data have different coding methods, as well as the case where each set of classified data has a different coding method when a plurality of classified data sets exist.

As the first coding method, any one of Huffman coding, run length coding, B1 coding, B2 coding, Wyle coding, Golomb coding, Golomb-Rice coding, and binary arithmetic coding can be adopted.

As the second coding method, any one of Huffman coding, universal coding, and multi-valued arithmetic coding can be used.

In the data compression method of the present invention, if the amount of the coded data is larger than a predetermined information amount determined based on the original data, it is preferable for the coded data to be obtained by coding the classified data according to a third coding method, out of the

classification information data and/or the data having the representative value and the classified data.

It is preferable for the third coding method to be any one of Huffman coding, arithmetic coding, and PCM (Pulse Code Modulation) without any coding.

As the "predetermined information amount determined based on the original data", the amount of the original data may be used. It is preferable for the predetermined information amount to be an information amount smaller than the amount of the original data and enabling reduction in an information amount when at least the classified data out of the classification information data and/or the data having the representative value and the classified data are coded according to the third coding method.

A data compression apparatus of the present invention is a data compression apparatus for obtaining compressed coded data by quantization of original data to obtain quantized data followed by coding and compression of the quantized data. The data compression apparatus comprises:

classification means for classifying the quantized data into data having a representative value representing the quantized data and at least one set of classified data having a data value other than the representative value and for obtaining classification information data representing this classification;

first coding means for coding the classification

information data by using a first coding method; and

second coding means for coding at least the classified data according to a second coding method, out of the data having the representative value and the classified data.

5 It is preferable for the second coding method carried out by the second coding means to be different for the data having the representative value and each set of the classified data.

It is preferable for the data compression apparatus of the present invention to further comprise wavelet transform means for obtaining the quantized data by carrying out wavelet transform on the original data followed by quantization thereof, or DCT means for obtaining the quantized data by carrying out DCT on the original data followed by quantization thereof.

Furthermore, it is preferable for the classification means to classify the quantized data by letting the data having the representative value be 0 data representing the value of 0 of the quantized data and letting the classified data be non-zero data representing non-zero values of the quantized data.

20 Moreover, it is preferable for the data compression apparatus of the present invention to further comprise:

judging means for judging whether or not the amount of the coded data is larger than a predetermined information amount determined based on the original data; and

25 third coding means for obtaining the coded data by coding at least the classified data according to a third compression

method out of the classification information data and/or the data having the representative value and the classified data, in the case where the judging means has judged the amount of the coded data to be larger than the predetermined information amount.

The processing carried out in the above-described data compression method may be provided in the form of a computer-readable recording medium storing a program to cause a computer to execute the method.

According to the present invention, the quantized data obtained by quantization of the original data are classified into the data having the representative value, the classified data, and the classification information data showing a classification result according to the data values. The classification information data are data having a comparatively small information amount, such as binary data or 3-valued data, although the amount depends on the classification. Therefore, coding by a simple coding method can be carried out at a high compression rate and with a light computational load. The data having the representative value are data containing only one value. Therefore, coding can be carried out with a small amount of computation and at a comparatively high compression rate. The classified data other than the data having the representative value are multi-valued. However, since the representative value have been eliminated, the ratio of these data to the total quantized data is comparatively low. For

example, in the case of 0.5 bit/pixel (1/20 compression of 10-bit data), if 0 is the representative value, the ratio of non-zero values is only about 13 %. Therefore, the amount of data to be processed is small, although the data are multi-valued.

5 Consequently, in the present invention, although coding of multi-valued data is carried out, the computational load therefor is lighter than the conventional compression algorithm described above, and the data having the representative value and the classification information data can be compressed at a high compression rate with a light computational load. In this manner, the original data can be compressed fast and efficiently, at a high compression rate.

 Furthermore, by classifying the quantized data into 0 data and non-zero data, classification becomes easy and compression of 0 data in the classified data is not necessary. Therefore, the original data can be compressed faster with a smaller computational load.

 Moreover, since the classification information data have a comparatively small information amount, such as binary data and 3-valued data, the classification information data can be
20 compressed fast and efficiently by any one of the Huffman coding, run length coding, B1/B2 coding, Wyle coding, Golomb coding, Golomb-Rice coding, and binary arithmetic coding, which are all comparatively simple operations.

25 The multi-valued data in the classified data occupies a small portion of the entire quantized data. Therefore,

efficient coding can be carried out by using any one of the Huffman coding, universal coding, and multi-valued arithmetic coding which enable high compression rate coding although computation therefor is complex.

5 According to the present invention, the original data can be compressed at a high compression rate. For example, when the original data represents a background image with plain signal values, only either the data having the representative value or the classified data have information if the original data are quantized and classified into the data having the representative value and the classified data. Therefore, the amount of classification information data is large and the amount of the coded data may become larger than the amount of the original data. In a case like this, the information amount of the coded data is compared with the predetermined information amount determined based on the original data, and when the former is larger than the latter, at least the classified data are coded out of the classification information data and/or the data having the representative value and the classified data, according to the third coding method.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic block diagram showing a configuration of a data compression apparatus according to a first embodiment of the present invention;

25 Figures 2a, 2b and 2c are diagrams for explaining wavelet transform;

Figure 3 is a diagram showing scalar quantizers;

Figure 4 is a diagram showing sum sets of 2 scalar quantizers;

Figure 5 is a 4-state trellis diagram;

Figure 6 is a flow chart showing processing carried out by the first embodiment;

Figure 7 is a schematic block diagram showing a configuration of a data compression apparatus according to a second embodiment of the present invention;

Figure 8 is a schematic block diagram showing a configuration of a data compression apparatus according to a third embodiment of the present invention;

Figure 9 is a flow chart showing processing carried out by data compression apparatus according to the third embodiment;

Figure 10 is a schematic block diagram showing a configuration of a data compression apparatus according to a fourth embodiment of the present invention;

Figure 11 is a schematic block diagram showing a configuration of a conventional data compression apparatus; and

Figure 12 is a schematic block diagram showing a configuration of another conventional data compression apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, embodiments of the present invention will be explained with reference to the accompanying drawings.

Figure 1 is a schematic block diagram showing a configuration of a data compression apparatus according to a first embodiment of the present invention. As shown in Figure 1, the data compression apparatus according to the first embodiment comprises wavelet transform means 1 for obtaining wavelet-transformed data WS in each subband at each resolution by carrying out wavelet transform on original image data S, classification and bit allocation means 2 for classifying the wavelet-transformed data WS and for determining bit allocation for each class, quantization means 3 for obtaining quantized data RS by quantizing the wavelet-transformed data WS according to the bit allocation determined by the classification and bit allocation means 2, classification means 4 for obtaining 0 data S0, non-zero data NS and classification information data B representing a classification result through classification of the quantized data RS, first coding means 5 for coding the classification information B according to a first coding method, second coding means 6 for coding the non-zero data NS B according to a second coding method, and recording means 7 for recording coded data F resulting from the coding in a recording medium.

The wavelet transform means 1 carries out wavelet transform on the original image data S as follows. As shown in Figure 2(a), the original image data S are subjected to wavelet transform and decomposed into 4 sets of data at a plurality of resolutions, namely LL1, HL0, LH0, and HH0. The data LL1 represents an image whose width and height are 1/2 of

those of the original image, and the data HL0, LH0 and HH0 respectively represent images of a vertical edge component, a horizontal edge component, and a diagonal edge component. As shown in Figure 2(b), 4 sets of data LL2, HL1, LH1 and HH1 are obtained through wavelet transform on the data LL1. The data LL2 represents an image whose width and height are 1/2 of those of the data LL1, and the data HL1, LH1 and HH1 represent images of vertical, horizontal and diagonal edge components of the data LL1 respectively. The wavelet transform is repeated a desired number of times on data LL obtained at each wavelet transform, and data at multiple resolutions are obtained thereby. When the wavelet transform is carried out 3 times, as shown in Figure 2(c), data at 3 resolutions can be obtained. In this embodiment, data at each resolution, that is, data in each subband, are all called wavelet-transformed data WS.

The classification and bit allocation means 2 determines the classification and bit allocation of the wavelet-transformed data WS in the following manner. For example, the wavelet-transformed data WS in each subband obtained by carrying out wavelet transform as shown in Figure 2(c) are classified into 4 classes, namely data LL2, data HHn ($n = 0 \sim 2$), data HLn ($n = 0 \sim 2$), and data LHn ($n = 0 \sim 2$). This is because the data in each class have statistically similar signal values. For the data in each class, square error of the data values is calculated for example, and the bit allocation is determined based on the magnitude of the square error. For

example, when the square error is large, a large number of bits are allocated for data saving. When the square error is small, a small number of bits are allocated, since missing data are allowed to some degree.

5 The quantization means 3 carries out quantization of the wavelet-transformed data WS according to a TCQ (Trellis Coded Quantization), based on the bit allocation determined by the classification and bit allocation means 2. The TCQ method is based on the TCM (Trellis Coded Modulation) developed in the field of signal communication and audio coding, and has been generated by extending this TCM method for image coding. The TCQ method can be considered theoretically to have the same meaning as infinite-length vector quantization. From the viewpoint of the rate-distortion theory, an S/N ratio can be improved by several dB's compared with conventional scalar quantization. The TCQ method is one of vector quantization methods. In the TCQ method, for a plurality of signal inputs (b_1, b_2, \dots, b_n), the same number of quantized values (q_1, q_2, \dots, q_n) are output. The quantized values are determined by using the Viterbi algorithm for searching for a path along which a total of quantization errors becomes minimal for the input vector. In this embodiment, the Viterbi algorithm is applied by letting a mean square of each quantization error be the cost of the path. In the TCQ method, sets of a plurality of quantization representative values are defined, and the quantization representative value sets are used properly

depending on a state. For example, when the classification and bit allocation means 2 has allocated 4 bits and an index (which will be explained later in detail) after quantization is expressed by 4 bits or fewer, quantization can be carried out easily by normally using quantization representative values of 16 points. In the TCQ method, 2 sets of quantization representative values (for example, Q1 and Q2) for 16 points are used, and which set of the quantization representative values is used is defined depending on the state, such as Q1 for a state S0, and Q2 for a state S1. State transition rules which are common for both quantization and inverse quantization are defined in advance. Quantization progresses while the state transits every time quantization is carried out on one pixel. In this manner, by carrying out quantization processing, 32 quantization representative values (31 for the case where 0 is used twice) which is double the values in the normal case can be used apparently, and selection of the path for reducing the quantization error is widened. Hereinafter, the TCQ quantization method will be explained more specifically.

Figure 3 shows 4 scalar quantizers D0 to D3, and Figure 4 shows sum-sets (sum-set quantizer) of 2 scalar quantizers. Figure 5 shows a 4-state trellis diagram. In Figure 3, Δ is a quantization step size determined by the quantization bit allocation, and assumed to be 0.5 in this embodiment. In Figure 4, a sum-set quantizer D0&D2 (=A0) of scalar quantizers D0 and D2, and a sum-set quantizer D1&D3 (=A1) for scalar quantizers

D1 and D3 are shown. In this embodiment, a signal comprising 5 elements as input wavelet-transformed data WS is used and the 5 elements are expressed as $WS = (0.5, -3, -3, 0.25, -2.5)$. Figure 5 shows, as state transitions, how an optimal quantizer is selected when the signal having the 5 elements is quantized at one time. The transition states are shown by the selected quantizers. In other words, the state wherein the sum-set quantizer D0&D2 has been selected is shown as "state D0&D2". The method of quantization will be explained below.

The quantization method according to the TCQ method examines all paths of the trellis diagram defined as shown in Figure 5, and finds out the path along which mean square errors (hereinafter called MSE) of all elements of the input signal after quantization become minimal. More specifically, when 0.5, which is the first element of the wavelet-transformed data WS, is quantized by the quantizer D2 out of the quantizers D0 to D3, MSE becomes $(0.5 - \Delta)^2 = 0.0$ which is a minimum. For the next element -3, if quantization is carried out by the quantizer D2, MSE becomes $(-3 - (-6\Delta))^2 = 0.0$ which is also a minimum.

Meanwhile, as restraints of trellis transition, paths are limited in a manner such that for the sum-set quantizer D0&D2, a subsequent quantizer is D0 (the state shifts to D0&D2), or D2 (the state shifts to D1&D3). For the sum-set quantizer D2&D0, a subsequent quantizer is D2 (the state shifts to D0&D2), or D0 (the state shifts to D1&D3). For the sum-set quantizer D1&D3,

a subsequent quantizer is D1 (the state shifts to D2&D0), or D3 (the state shifts to D3&D1). For the sum-set quantizer D3&D1, a subsequent quantizer is D3 (the state shifts to D2&D0) or D1 (the state shifts to D3&D1). These restraints have been pre-set and for the sum-set quantizer D0&D2, the subsequent quantizer D0 corresponds to the state D0&D2, while D2 corresponds to the state D1&D3. For the sum-set quantizer D2&D0, the subsequent quantizer D2 corresponds to the state D0&D2, while D0 corresponds to D1&D3. For the sum-set quantizer D1&D3, the subsequent quantizer D1 corresponds to D2&D0 while D3 corresponds to D3&D1. For the sum-set quantizer D3&D1, the subsequent quantizer D3 corresponds to the state D2&D0, while D1 corresponds to the state D3&D1.

A restraint length of the trellis transition branches in the trellis diagram corresponds to the number of elements of the signal (in this embodiment, the restraint length is 5, since the number of the elements is 5), and MSE is calculated as the cost in all combinations of the trellis transitions. The path along which the sum of the cost becomes minimal is selected, and the quantizers are selected by the path to carry out quantization. The cost is basically calculated for all paths. However, when the cumulative cost of a path being calculated exceeds the minimum cost of another path having been calculated, the cost calculation is interrupted and the cost of a subsequent path is then calculated, for example. In this manner, an operation speed is increased. In Figure 5, the cost at all paths

are shown. Along the path having the minimum cost (indicated by a thick line in Figure 5), the quantizer D2&D0 (=A0) has been selected in the initial state, and D2 (the state D0&D2=A0), D2 (the state D1&D3=A1), D3 (the state D3&D1=A1), D1 (the state D3&D1=A1), and D3 (the state D2&D0=A0) have been selected in this order and the signal is quantized as $WS' = (0.5, -3, 3, 0, -2.5)$. For the elements 0.5, -3, 3, and -2.5 in the signal WS, MSE = 0. However, for the element 0.25, the MSE becomes 0.0625 which is a minimum when the quantizer D1 is selected. Therefore, the cost at this time becomes

$$(0.5-\Delta)^2+(-3-(-6\Delta))^2+(3-6\Delta)^2+(0.25-0)^2+(-2.5-(-5\Delta))^2=0.0625$$

The index of the quantizers is defined as shown in Figure 4. In this embodiment, the index is output instead of the quantized values. Furthermore, the sum-set quantizer D0&D2 is coded as 00 in 2 bits, while D2&D0, D1&D3, D3&D1 are coded into 01, 10, and 11. Therefore, the quantized data RS (1, -3, 3, 0, -3) and the code 01 representing the initial state are found at this time by correlating $WS' = (0.5, -3, 3, 0, -2.5)$ and the index of the quantizers shown in Figure 4. In the case of 8-state trellis diagram, the information indicating the initial state is expressed by 3 bits.

An inverse quantization method in TCQ method will be explained next. The inverse quantization is carried out on the elements, starting from the first value of the index. As has been described above, when the index is (1, -3, 3, 0, -3), since the first value of the index is 1, the first value of the element

can be estimated as Δ ($=0.5$) or $-\Delta$ ($=-0.5$), by comparing the 2 sum-set quantizers A0 and A1 shown in Figure 4. However, since the initial state shows 01, that is, the state D2&D0 ($=A0$), the quantizer D2 is selected according to the trellis transition rule shown in Figure 5. Therefore, Δ of the quantizer D2, that is, 0.5 is obtained. The transition state then shifts to D2 (D0&D2 = A0). Likewise, since the next value of the index is -3, the element corresponding to this index can be estimated as -6Δ ($=-3$) or -5Δ ($=-2.5$) by comparing the 2 sum-set quantizers A0 and A1. According to the trellis transition rule, the quantizer D2 is selected, and the value -6Δ of the quantizer D2, that is, -3 is found. The transition state then shifts to D2 (D1&D3 = A1).

Likewise, since the next value of the index is 3, the element corresponding to this can be estimated as 5Δ ($=2.5$) or 6Δ ($=3$) by comparing the 2 sum-set quantizers A0 and A1. According to the trellis transition rule, the quantizer D3 is selected, and the value 6Δ of the quantizer D3, that is, 3 is found. The transition state then shifts to D3 (D3&D1 = A1). Since the next value of the index is 0, the element corresponding to this can be estimated as 0 by comparing the 2 sum-set quantizers A0 and A1. According to the trellis transition rule, the quantizer D1 is selected, and the value 0 of the quantizer D1 is found. The transition state then shifts to D1 (D3&D1 =

A1). Since the next value of the index is -3, the element corresponding to this can be estimated as $-6\Delta (= -3)$ or $-5\Delta (= -2.5)$ by comparing the 2 sum-set quantizers A0 and A1. According to the trellis transition rule, the quantizer D3 is selected, and the value -5Δ of the quantizer D3, that is, -2.5 is found. In this manner, the signal (0.5, -3, 3, 0, -2.5) is restored.

As has been described above, by defining trellis transition and by selecting the optimal scalar quantizer according to the rule, quantization can be carried out. For details of the TCQ method, see the reference by P. Sriram and others.

The classification means 4 classifies the quantized data RS according to their data values. At this time, the quantized data RS are classified into the data having the representative value and data having values other than that. For example, in this embodiment, 0 is the representative value for the quantized data RS, and the quantized data RS are classified into 2 classes, namely 0 data S0 and non-zero data NS. If quantization is carried out after the wavelet transform on the original image data S, the ratio of 0-values to the quantized data RS becomes substantially large. For example, if 0.5 bit/pixel compression (10-bit original image data S are compressed to 1/20) is carried out, the rate of the non-zero data NS to the entire data is approximately 13 %. In this manner, the quantized data RS are

classified into the 0 data S0, the non-zero data NS, and the classification information data B representing information regarding this classification. The classification information data B is binary data representing the result of classification of the quantized data into the 0 data and the non-zero data.

The first coding means 5 is for coding the classification information data B and any one of the Huffman coding, run length coding, B1 coding, B2 coding, Wyle coding, Golomb coding, Golomb-Rice coding, and binary arithmetic coding, all of which are comparatively simple operations, is adopted as the coding method.

Huffman coding is widely known as a method of generating instantaneously decodable compact code. In the Huffman coding, when a probability distribution of information source alphabets is provided, instantaneously decodable compact code can always be obtained by using a simple algorithm. Therefore, this is a extremely effective coding algorithm.

The run length coding is a coding method wherein length of symbols "0" and "1" are coded or a specific pattern considering an interval of appearance probability of "0" and "1" is coded when the symbol "0" in binary information has a higher probability which is close to 1 or when long runs of "0" or "1" appear alternately.

B1 and B2 coding is one of the run length coding methods and the detail thereof is described in "T. Fukinuke, Digital

Image Signal Processing (in Japanese), Nikkan Kogyo Shinbun Co,
May 25, 1981".

Wyle coding is one of the run length coding methods. Wyle coding has been proposed based on a principle that an average code length is shortened by measuring a probability distribution of a run of each symbol represented by a sequence of "0" and "1" and then by assigning a short code for a run having a high probability and a long code for a run having a low probability.

Golomb coding has been known as code of an efficient entropy coding for a geometric distribution information source. The code cannot necessarily be a compact code. This method is called Golomb-Rice method when the degree is a power of 2, and coding and decoding by a simple configuration becomes possible.

The arithmetic coding uses uniquely decodable compact code. This coding method has extreme generality including the Huffman coding. Coding and decoding can be executed by carrying out arithmetic operations, and a symbol in a information source symbol sequence is coded by executing an algorithm. The arithmetic coding can be considered as a process of sequentially dividing a unit interval $[0, 1)$ into partial intervals satisfying the following 2 conditions:

(1) Each code word is a sum of appearance probability (cumulative probability) of proceeding information source symbol.

(2) The width of a partial interval in the right of each code

word is the probability of the symbol.

The binary arithmetic coding is appropriate for binary data.

5 The above-described run length coding, B1 coding, B2 coding, Wyle coding, Golomb coding, Golomb-Rice coding, and binary arithmetic coding are appropriate for coding binary data.

The second coding means 6 is for coding the non-zero data NS. As a method used here, any one of the Huffman coding, universal coding, and multi-valued arithmetic coding can be used. These coding methods are efficient, that is, they enable data coding at a high compression rate, although the operation therefor is complex.

15 The universal coding is a block coding method asymptotically optimal for an information source whose parameter is unknown. The universal coding satisfies the following 2 conditions:

(1) Coding is carried out depending only on a statistic amount of a measured information source message block, not depending on a past or future block. In other words, coding is carried out memorylessly on each block.

(2) As the block becomes longer indefinitely, a characteristic of optimal code represented by various measures is achieved to an arbitrary approximation degree.

25 As the universal coding, Lynch-Davission coding, Lawrence coding, and the like are well-known.

In the arithmetic coding described above, the multi-valued arithmetic coding is appropriate for multi-valued data.

The above-described coding methods carried out by the first and second coding means 5 and 6 are described in detail in "Kasahara et al, Digital Communication Systems (in Japanese), Shokodo Co, Feb. 25, 1992".

An operation of the first embodiment will be described next. Figure 6 is a flow chart showing processing carried out by the data compression apparatus according to the first embodiment.

The wavelet transform means 1 carries out wavelet transform on the original image data S to obtain the wavelet-transformed data WS, as has been described above (step S1). The classification and bit allocation means 2 then classifies the wavelet-transformed data WS and determines the bit allocation of each class (step S2). The quantization means 3 quantizes the wavelet-transformed data WS in each class based on the determined bit allocation. The quantized data RS are obtained in this manner (step S3). The quantized data RS are classified into the 0 data S0 and the non-zero data NS by the classification means 4, and the classification information data B indicating classification of the 0 and non-zero data are obtained (step S4).

The classification information data B are coded by the first coding means 5 according to any one of the above-described Huffman coding, run length coding, B1 coding, B2 coding, Wyle

coding, Golomb coding, Golomb-Rice coding, and binary arithmetic coding (step S5). Meanwhile, the non-zero data NS are coded by the second coding means 6 according to any one of the above-described Huffman coding, universal coding, and multi-valued arithmetic coding (step S6). The processing at the steps S5 and S6 may be exchanged, or carried out in parallel. The coded classification information data B and the non-zero data NS are recorded as coded data F in a recording medium by the recording means 7 (step S7), and the processing ends.

In order to decode the coded data F, processing which is a reversal of the flow chart shown in Figure 6 is carried out. In other words, the classification information data B and the non-zero data NS are obtained by decoding the coded classification information data B and the non-zero value data NS both included in the coded data F, according to decoding methods corresponding to the coding methods. The quantized data RS are obtained by finding the 0 data S0 based on the classification information B and the non-zero data NS. The quantized data RS are inversely quantized and the wavelet-transformed data WS are obtained. By carrying out inverse wavelet transform on the wavelet-transformed data WS, the original image data S are finally obtained.

The classification information data B obtained in the first embodiment are binary data, and have a comparatively small data size. Therefore, coding having a light computational load and at a high compression rate can be carried out by the first

coding means 5 employing the simple coding method. The 0 data S0 inherently have no information. Therefore, decoding can be carried out without coding the 0 data if only the classification information regarding the classification of the 0 data and the non-zero data is available. Furthermore, although the non-zero data NS are multi-valued, the rate thereof to the total quantized data RS is only approximately 13 %. Therefore, a computational load can be reduced even when the coding method having high efficiency but computational complexity is employed by the second coding means 6.

Therefore, in this embodiment, although the coding of the multi-valued non-zero data NS is carried out, the computational load is comparatively lighter than the conventional compression algorithm described above, and the classification information data B can be compressed at a high compression rate, with a small computational load. In this manner, the original image data S can be compressed fast and at a high compression rate.

In this embodiment, since the quantized data RS are classified into the 0 data S0 and the non-zero data NS, classification thereof is easy. Furthermore, compression of the 0 data S0 is not necessary, which leads to a lighter computational load and fast compression of the original image data S.

The compression efficiency and the operation load therefor are almost the same between the case where the original image data S are compressed to 1/20 according to the conventional

WTCQ method and the case where the original image data S are compressed to 1/17 by the coding method in this embodiment. Therefore, a degree of performance degradation of the coding method in this embodiment compared with the WTCQ method is comparatively low. This has been confirmed through an experiment carried out by the applicant of the present invention.

A second embodiment of the present invention will be explained next. Figure 7 shows a schematic block diagram of a configuration of a data compression apparatus according to the second embodiment of the present invention. In the second embodiment, the data compression apparatus comprises DCT means for transforming the original image data S according to discrete cosine transform (DCT), not according to the wavelet transform, and the data classification in the case of the wavelet transform is not carried out. In the second embodiment, DCT, bit allocation, and quantization are a quantization method standardized according to the JPEG format.

By applying the present invention to the method standardized according to the JPEG format as in the above, the original image data S can be coded fast and efficiently, as in the first embodiment.

According to the above first and the second embodiments, the original image data S can be compressed at a high compression rate. However, in the case where the original image data S represents a background image having a plain signal value and

the original image data S are classified into the 0 data S0 and the non-zero data NS after quantization of the original data for example, the coded data F may have a larger amount of information than the original image data S, since the amount of the classification information B is large due to the quantized data having been classified into the non-zero data NS only. An embodiment to solve this problem will be explained next as a third embodiment.

Figure 8 is a schematic block diagram showing a configuration of a data compression apparatus according to the third embodiment of the present invention. In the third embodiment, the same reference numerals as in the first embodiment are used and detailed explanation thereof will be omitted. In the third embodiment, the data compression apparatus comprises comparison means 12 for comparing the information amount between coded data F1 in each subband in the coded data F obtained by the first embodiment and the wavelet-transformed data WS, and third coding means for obtaining coded data F2 by coding the quantized data RS according to a third coding method when the information amount of the coded data F1 in each subband has been judged by the comparison means 12 to be larger than that of the wavelet-transformed data WS.

The comparison means 12 compares the information amount between the coded data F1 in each subband and the wavelet-transformed data WS. In the case of the above-described TCQ method, since the original number of bits is 16 for example,

the amount of the wavelet-transformed data WS is the length of the signal sequence in the quantized data $RS \times 16$ bits. When the information amount of the coded data F1 is larger than that of the wavelet-transformed data WS, the third coding means 13 carries out coding on the quantized data RS according to the third coding method and obtains the coded data F2. When the coded data F1 have smaller amount of data than the wavelet-transformed data WS, the coded data F1 are input to the recording means 7 as the coded data F.

As the coding method employed by the third coding means 13, a method which enables efficient data coding at a high compression rate, such as Huffman coding and multi-valued arithmetic coding, can be used, although the operation therefor is complex. However, the PCM method which carries out no coding may be adopted. The coding method used by the third coding means is also described in the above-cited reference by Kasahara et al.

An operation of the third embodiment will be described next. Figure 9 is a flow chart showing the operation carried out by the third embodiment. In the flow chart in Figure 9, processing from step S11 through step S16 is the same as the processing from the step S1 through the step S6 in the flow chart shown in Figure 6. Therefore, explanation thereof is not repeated. In the step S16, the non-zero data NS are coded according to the second coding method and the coded data F1 in each subband are obtained. The coded data F1 are then input

to the comparison means 12 and compared with the wavelet-transformed data WS (step S17). Whether or not the coded data F1 in each subband have a larger information amount than the wavelet-transformed data WS is judged (step S18). If the coded data F1 in each subband have a larger information amount than the wavelet-transformed data WS, the third coding means 13 carries out coding on the quantized data RS in the subband according to the third coding method and the coded data F2 are obtained (step S19). When the step S18 is denied, the coded data F1 are the final coded data F in the subband. For each subband, the processing from the step S17 to the step S19 is carried out and the coded data F1 or F2 in each subband are recorded as the final coded data F in a recording medium by the recording means 7 (step S20), and the processing ends.

As has been described above, in the third embodiment, the amount of information of the coded data F1 in a subband is compared with that of the wavelet transformed data WS. In the case where the information amount of the coded data F1 in the subband is larger than that of the wavelet-transformed data WS, the quantized data RS in the subband are coded according to the third coding method such as the Huffman coding. Therefore, the information amount of the coded data F obtained finally does not exceed the information amount of the wavelet-transformed data WS. In this manner, efficient coding of the original image data S can be carried out.

In order to decode the coded data F obtained in the third

embodiment, processing which is a reversal of the flow chart shown in Figure 9 is carried out. In other words, the coding method of the coded data F1 and F2 in each subband included in the coded data F is judged, and pairs of the non-zero data NS and the classification information B, as well as the quantized data RS are obtained by decoding the coded data F1 and F2 according to a decoding method corresponding to the coding method. For the pair of the classification information B and the non-zero data NS, the quantized data RS are obtained by finding the 0 data S0 based thereon. The quantized data RS are inversely quantized and the wavelet-transformed data WS are obtained. By carrying out inverse wavelet transform on the wavelet-transformed data WS, the original image data S are finally obtained.

A fourth embodiment of the present invention will be explained next. Figure 10 is a schematic block diagram showing a configuration of a data compression apparatus according to the fourth embodiment. The fourth embodiment differs from the third embodiment in the following points. First, the data compression apparatus comprises DCT means 10 for transforming the original image data S according to discrete cosine transform (DCT) method, not according to the wavelet transform method. Secondly, the data classification carried out in the case of the wavelet transform is not carried out. In the fourth embodiment, DCT, bit allocation, and quantization are a quantization method standardized according to the JPEG format,

as in the second embodiment.

In the fourth embodiment, the information amount of the coded data F obtained by the second embodiment is compared with that of the original image data S, and when the former is larger than the latter, coded data F3 are obtained by carrying out coding on the quantized data RS by the third coding means 13 according to the third coding method. The coded data F3 are recorded as the final coded data F in a recording medium by the recording means 7.

As has been described above, in the method standardized according to the JPEG format, the information amount of the coded data F is compared with that of the original image data S, as in the third embodiment. When the coded data F have a larger information amount than the original image data S, the quantized data RS are coded according to the third coding method. In this manner, coding of the original image data S can be carried out fast and efficiently as in the third embodiment.

In the above embodiments, the quantized data RS are classified into the 0 data S0 and the non-zero data NS, using 0 as the representative value. However, the quantized data may be classified into 3 classes, namely the 0 data, data having values larger than 0 and smaller than a threshold value, and data having values equal to or larger than the threshold value. For the data having the values smaller than the threshold value, the same coding as in the above embodiments is carried out. For the data having the values equal to or larger than the threshold

value, coding emphasizing efficiency is carried out thereon, since these values have a statistically small probability of appearance. As the representative value, 0 is not the only example, and an average of the quantized data RS may be used.

5 In this case, classification may be carried out according to various classification rules, such as data having the average value and the other values, the average and values lower than the average and higher than the average, and data whose absolute differences from the average are smaller than a threshold value and equal to or larger than the threshold value.

10 Furthermore, in the above embodiments, image data have been coded according to the data compression method and apparatus of the present invention. However, various kinds of data such as audio data and animation data can be coded by the data compression method and apparatus of the present invention.

15 Moreover, in the third and fourth embodiments, the amount of information of the coded data F1 has been compared with that of the wavelet-transformed data WS or the original image data S. However, the amount of information of the coded data F1 may
20 be compared with a predetermined threshold value which is smaller than the information amount of the wavelet-transformed data WS or the original image data S but enables reduction in the information amount when the quantized data RS are coded according to the third coding method.

What is claimed is:

1. A data compression method of obtaining compressed coded data by quantization of original data to obtain quantized data followed by coding and compression of the quantized data,
5 the data compression method comprising the steps of:

classifying the quantized data into data having a value representing the quantized data and at least one set of classified data representing a data value other than the representative value while obtaining classification information data regarding the classification;
10

coding the classification information data according to a first coding method; and

obtaining the coded data by coding at least the classified data according to a second coding method, out of the classified data and the data having the representative value.
15

2. A data compression method as claimed in Claim 1, wherein the second coding method is different between the data having the representative value and each set of the classified data.

3. A data compression method as claimed in Claim 1 or 2, wherein the quantized data are obtained by carrying out wavelet transform on the original data followed by quantization thereof.
20

4. A data compression method as claimed in Claim 1 or 2, wherein the quantized data are obtained by carrying out DCT on the original data followed by quantization thereof.
25

5. A data compression method as claimed in any one of Claims 1 to 4, wherein the data having the representative value are 0 data representing the value 0 of the quantized data , and the classified data are non-zero data representing a non-zero value of the quantized data.

6. A data compression method as claimed in any one of Claims 1 to 5, wherein the first coding method is any one of Huffman coding, run length coding, B1 coding, B2 coding, Wyle coding, Golomb coding, Golomb-Rice coding, and binary arithmetic coding.

7. A data compression method as claimed in any one of Claims 1 to 6, wherein the second coding method is any one of Huffman coding, universal coding, and multi-valued arithmetic coding.

8. A data compression method as claimed in any one of Claims 1 to 7, wherein the coded data are obtained by coding the classified data according to a third coding method, out of the classification information data and/or the data having the representative value and the classified data, in the case where the amount of the coded data is larger than a predetermined information amount determined based on the original data.

9. A data compression method as claimed in any one of Claims 1 to 8, wherein the third coding method is any one of Huffman coding, arithmetic coding, and PCM coding.

10. A data compression apparatus for obtaining compressed coded data by quantization of original data to obtain

quantized data followed by coding and compression of the quantized data, the data compression apparatus comprising:

classification means for classifying the quantized data into data having a representative value representing the quantized data and at least one set of classified data having a data value other than the representative value and for obtaining classification information data representing the classification;

first coding means for coding the classification information data by using a first coding method; and

second coding means for coding at least the classified data out of the data having the representative value and the classified data, according to a second coding method.

11. A data compression apparatus as claimed in Claim 10, wherein the second coding means carries out the second coding method which is different between the data having the representative value and each set of the classified data.

12. A data compression apparatus as claimed in Claim 10 or 11, further comprising wavelet transform means for obtaining the quantized data by carrying out wavelet transform on the original data followed by quantization thereof.

13. A data compression apparatus as claimed in Claim 10 or 11, further comprising DCT means for obtaining the quantized data by carrying out DCT on the original data followed by quantization thereof.

14. A data compression apparatus as claimed in any one

of Claims 10 to 13, wherein the classification means classifies the quantized data by letting the data having the representative value be 0 data representing the value of 0 of the quantized data and letting the classified data be non-zero data representing a non-zero value of the quantized data.

15. A data compression apparatus as claimed in any one of Claims 10 to 14, further comprising:

judging means for judging whether or not the amount of the coded data is larger than a predetermined information amount determined based on the original data; and

third coding means for obtaining the coded data by coding at least the classified data according to a third compression method, out of the classification information data and/or the data having the representative value and the classified data, in the case where the judging means has judged the amount of the coded data to be larger than the predetermined information amount.

16. A computer-readable recording medium storing a program to cause a computer to execute a data compression method of obtaining compressed coded data by quantization of original data to obtain quantized data followed by coding and compression of the quantized data, the program comprising the procedures of:

classification of the quantized data into data having a value representing the quantized data and at least one set of classified data representing a data value other than the

representative value, and acquisition of classification information data regarding the classification;

coding of the classification information data according to a first coding method; and

coding of at least the classified data out of the classified data and the data having the representative value, according to a second coding method.

17. A computer-readable recording medium as claimed in Claim 16, characterized by that the second coding method is different between the data having the representative value and each set of the classified data.

18. A computer-readable recording medium as claimed in Claim 16 or 17, the program further comprising the procedure of obtaining the quantized data by carrying out wavelet transform on the original data followed by quantization thereof.

19. A computer-readable recording medium as claimed in Claim 16 or 17, the program further comprising the procedure of obtaining the quantized data by carrying out DCT on the original data followed by quantization thereof.

20. A computer-readable recording medium as claimed in any one of Claims 16 to 19, wherein the procedure of classification is a procedure of classifying the quantized data by letting the data having the representative value be 0 data representing the value 0 of the quantized data, and by letting the classified data be non-zero data representing a non-zero

value of the quantized data.

21. A computer-readable recording medium as claimed in any one of Claims 16 to 20, the program further including the procedures of:


5 judgment as to whether or not the amount of the coded data is larger than a predetermined information amount determined based on the original data; and

acquisition of the coded data by coding at least the classified data according to a third compression method out of the classification information data and/or the data having the representative value and the classified data, in the case where the amount of the coded data has been judged to be larger than the predetermined information amount.

ABSTRACT OF THE DISCLOSURE

Fast and efficient data compression can be carried out. Original image data are subjected to wavelet transform. The obtained wavelet-transformed data are classified and bit allocation is determined. Based on the determined bit allocation, the wavelet-transformed data are quantized and quantized data are obtained. The quantized data are classified into 0 data and non-zero data. Binary classification information data indicating this classification are also obtained. The classification information data are coded according to a coding method having a comparatively simple operation, such as Huffman coding and run length coding. The multi-valued, non-zero data are coded according to a coding method having a high compression efficiency although having a comparatively complex operation, such as universal coding and Golomb-Rice coding.

FIG. 1

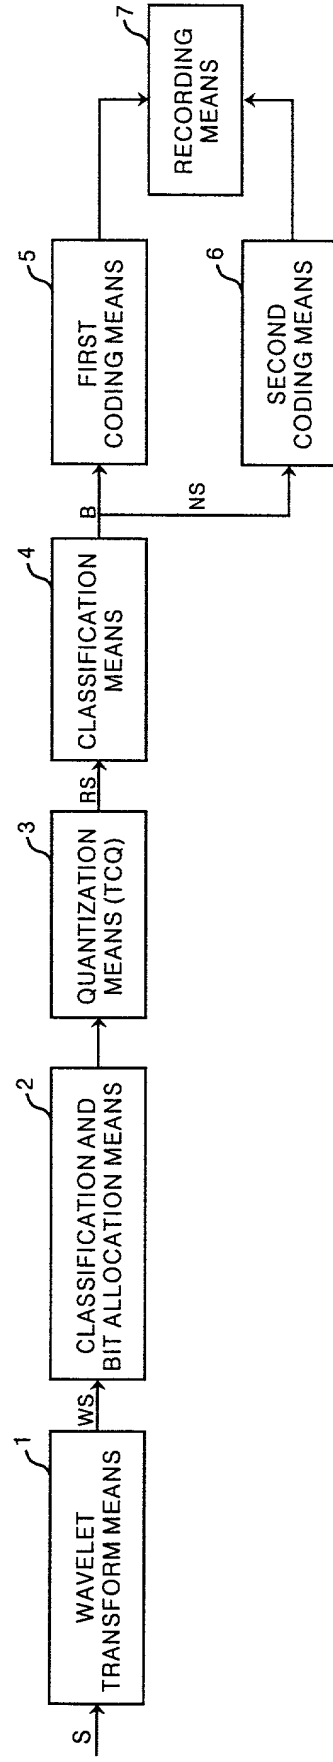






FIG.2a FIG.2b FIG.2c

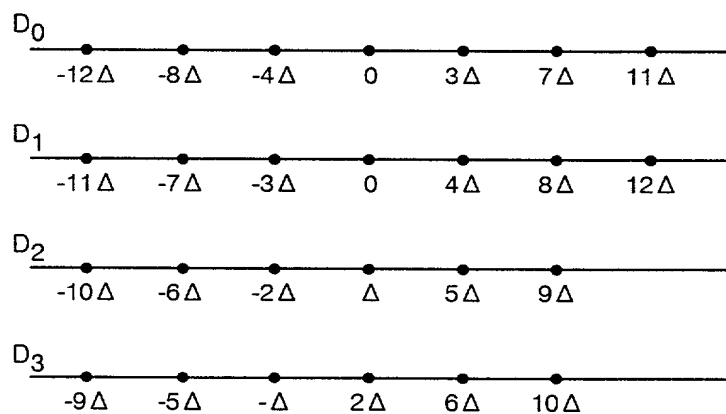


FIG.3

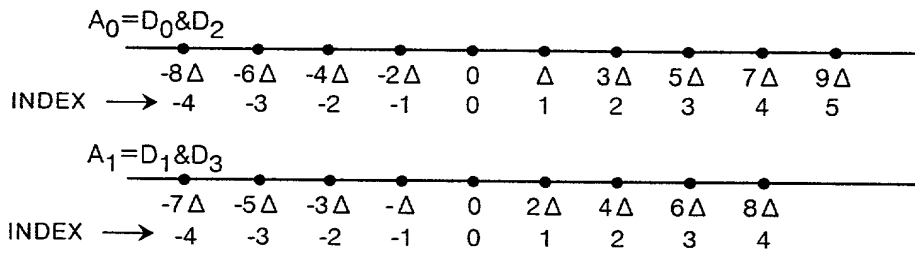


FIG.4

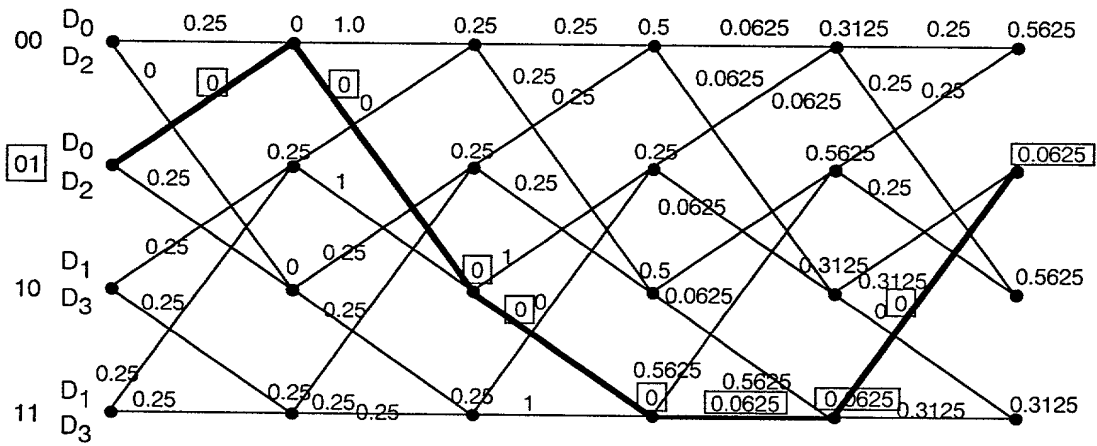


FIG.5

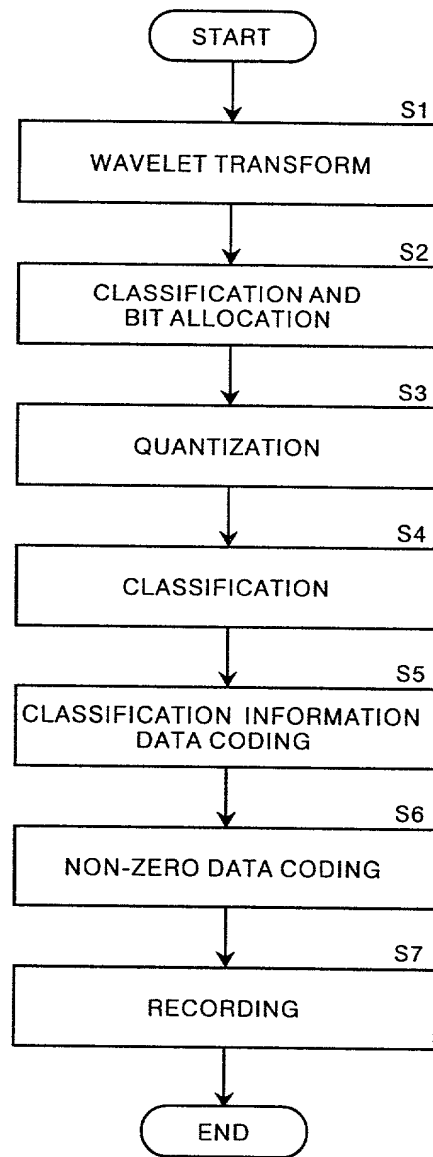


FIG.6

FIG. 7

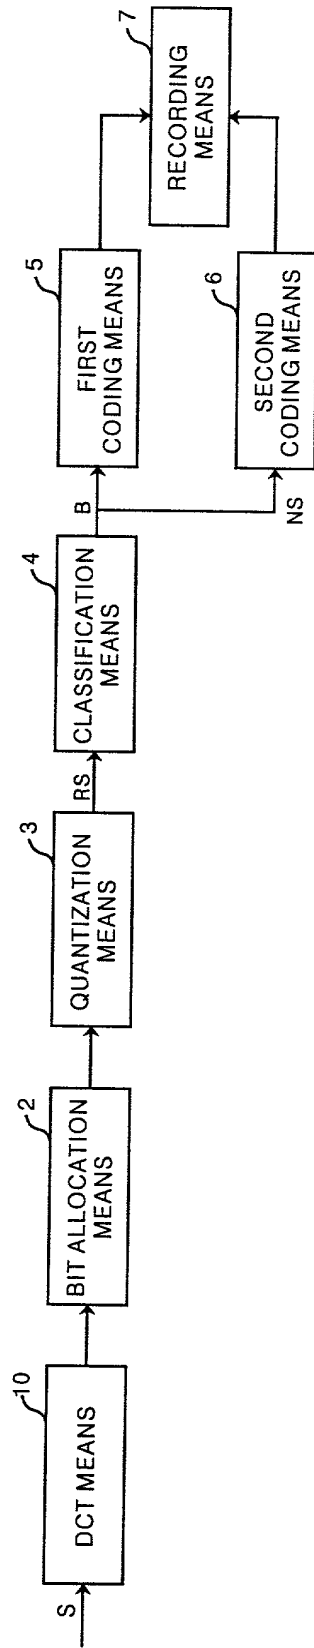
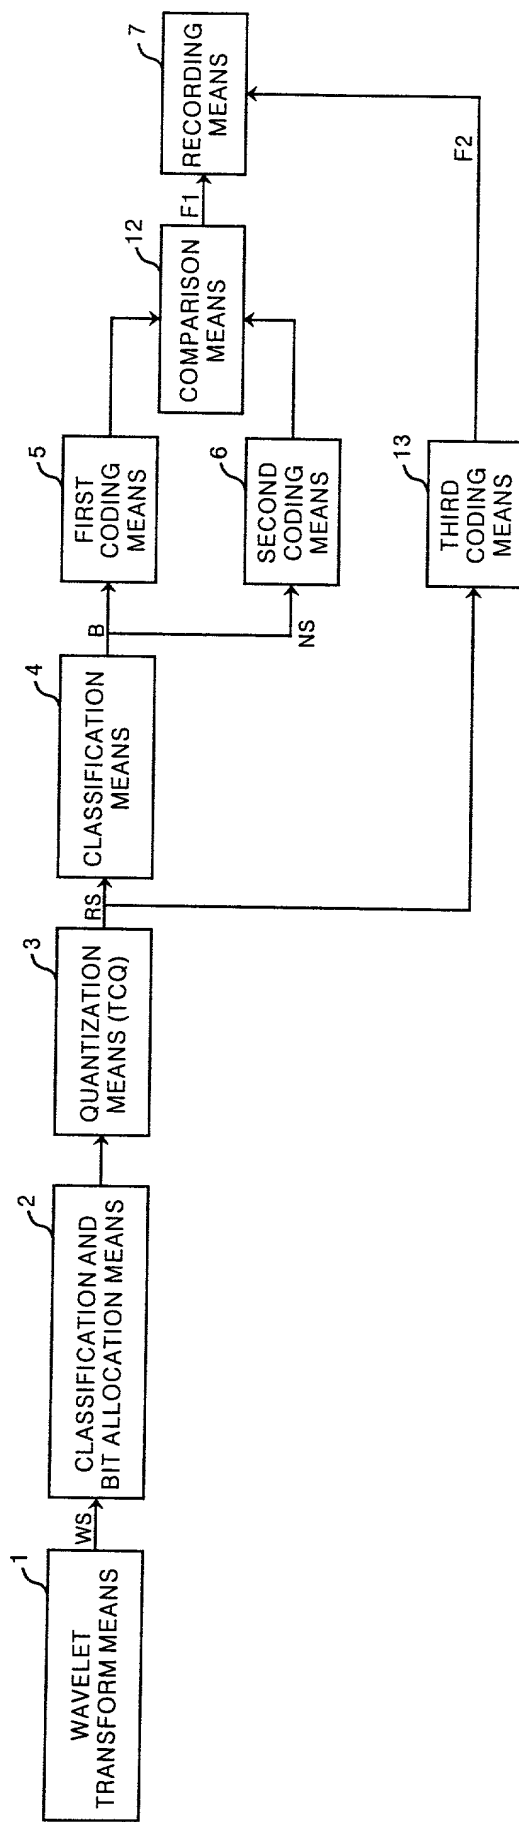


FIG. 8



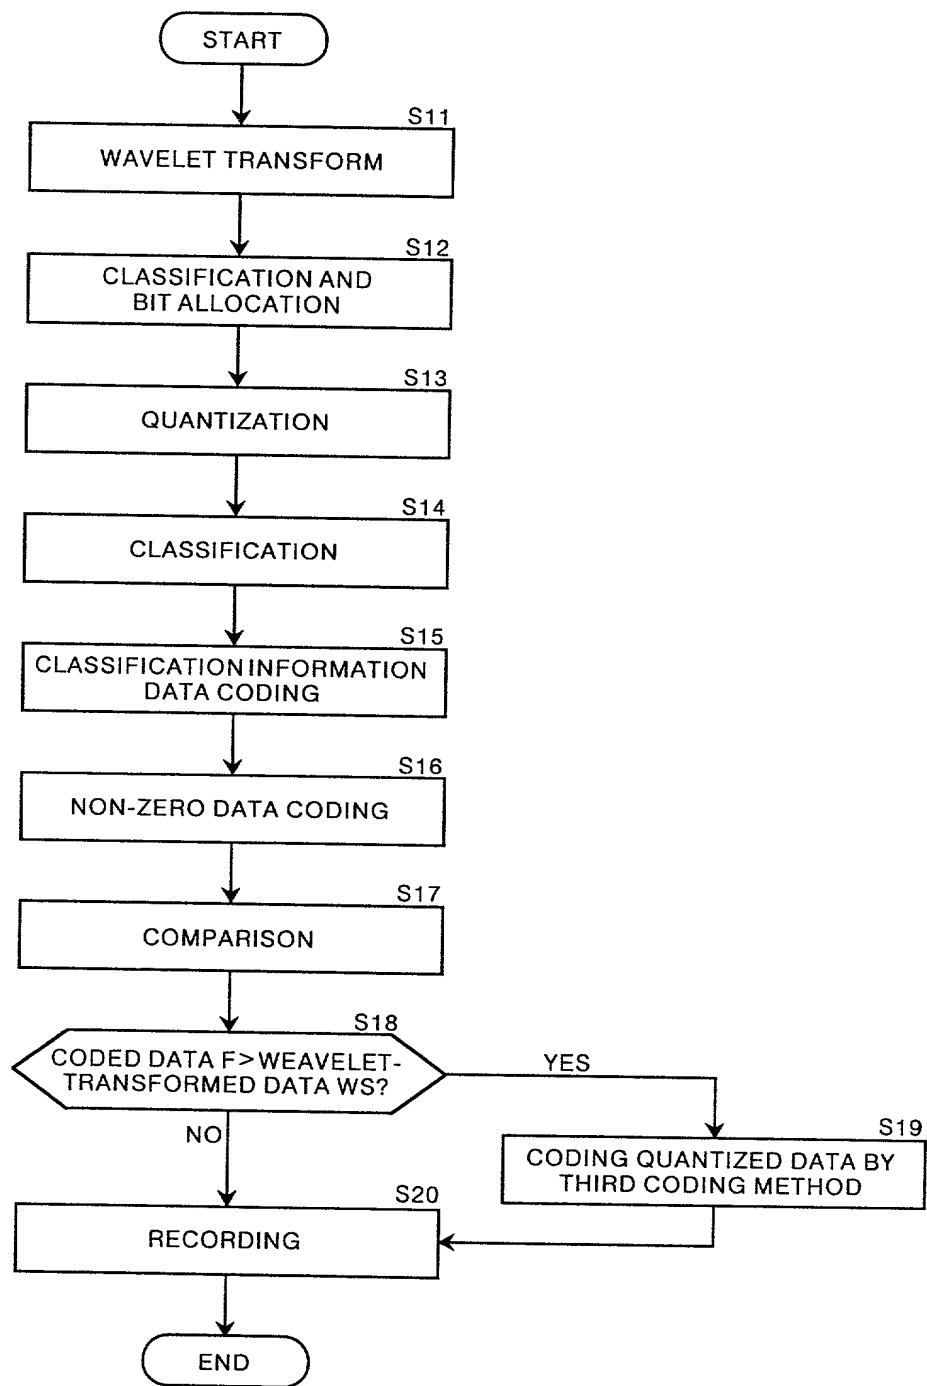


FIG.9

FIG. 10

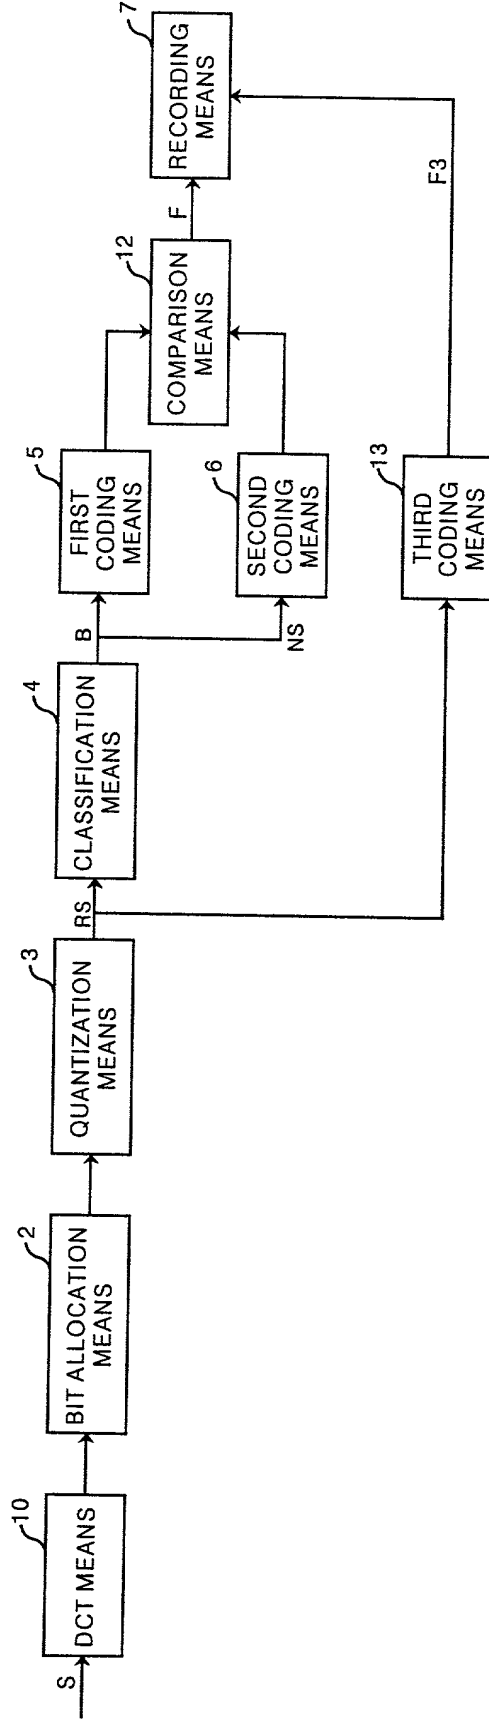


FIG. 11


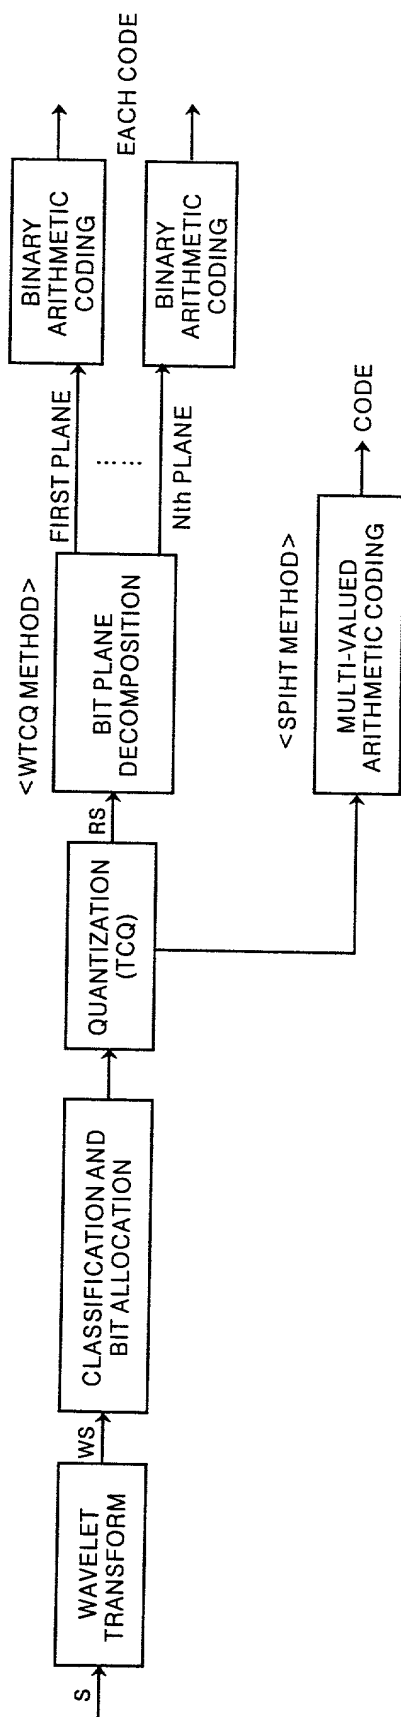


FIG. 12

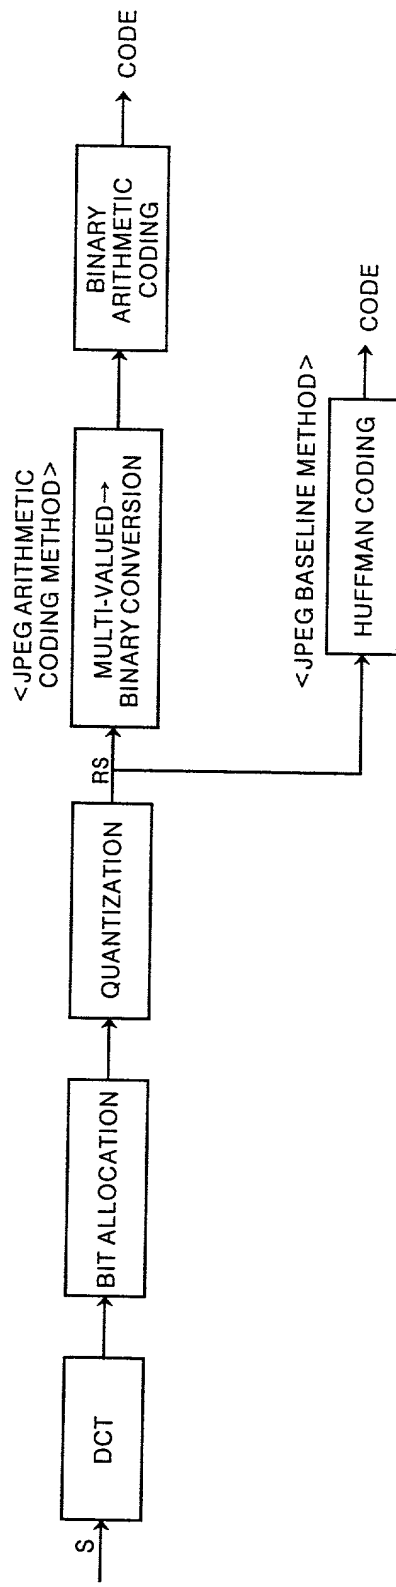

Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

As a below named inventor, I hereby declare that:

Hideya Takeo

My residence, post office address and citizenship are as stated next to my name, c/o Fuji Photo Film Co., Ltd., 798 Miyanodai, Kaisei-machi, Ashigarakami-gun, Kanagawa-ken, Japan
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"METHOD, APPARATUS AND RECORDING MEDIUM FOR DATA COMPRESSION"

上記発明の明細書（下記の欄でX印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約

国際出願番号を とし、

（該当する場合） に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number

_____ and was amended on

_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編第119条(a)-(d)項又は第365条(b)項に基き下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約第365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Applications

Priority Not Claimed
優先権主張なし

(patent) 202501/1998

(Number)
(番号)

Japan

(Country)
(国名)

17/07/1998

(Day/Month/Year Filed)
(出願年月日)

☐

(patent) 350159/1998

(Number)
(番号)

Japan

(Country)
(国名)

09/12/1998

(Day/Month/Year Filed)
(出願年月日)

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張致します。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編第120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約第365条(c)に基づく権利をここに主張します。又、本出願の各請求範囲の内容が米国法典第35編第112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内又は特許協力条約国際出願提出日までの期間中に入手された、連邦規則法典第37編第1条第56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit of Title 35, United States Code Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose any material information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言中で私が行う表明が真実であり、かつ私の入手した情報と私の信ずるところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は、下記の発明者として、本出願に関する一切の手続きを米国特許商標局に対して遂行する弁理士又は代理人として、下記のものを指名致します。(弁理士、又は代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

John H. Mion, Reg. No. 18,879; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102 and Brett S. Sylvester, Reg. No. 32,765

書類送付先:

Send Correspondence to:

SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202

直通電話連絡先: (名称及び電話番号)

Direct Telephone Calls to: (name and telephone number)

(202)293-7060

唯一又は第一発明者名	Full name of sole or first inventor		
	Hideya Takeo		
発明者の署名	日付	Inventor's signature	Date
		Hideya Takeo	July 13, 1999
住所	Residence		
	Kanagawa-ken, Japan		
国籍	Citizenship		
	Japan		
郵便の宛先	Post office address		
	c/o Fuji Photo Film Co., Ltd.		
	798 Miyanodai, Kaisei-machi, Ashigarakami-gun, Kanagawa-ken, Japan		
第二共同発明者名 (該当する場合)	Full name of second joint inventor, if any		
第二発明者の署名	日付	Second inventor's signature	Date
住所	Residence		
国籍	Citizenship		
郵便の宛先	Post office address		

(第三以降の共同発明者についても同様に記載し、署名をする (Supply similar information and signature for third and subsequent joint inventors.)